

## PRESTO W55 Process system

The powerful W55 regulates temperatures with high precision and convinces with faster cool-down and heat-up times. It is ideal for use in large external applications such as reactor temperature control, material stress testing or temperature simulation.


The highly dynamic temperature control systems PRESTO are designed for high-precision temperature control for a wide range of applications such as reactor vessels or material stress tests. Moreover, by using efficient components, the process systems can compensate exothermic and endothermic reactions exceptionally fast. Permanent internal monitoring and self-lubricating pumps ensure a long life-time. In addition, numerous interfaces offer many remote control possibilities across networks or for integration into higher-level control systems.



### Product features


- Temperature stability  $\pm 0.05\text{ °C}$  ...  $\pm 0.1\text{ °C}$
- Analog connections, RS485, Profibus DP (accessory)
- Second external Pt100 sensor connection (accessory)
- Built-in 5.7" industrial color touchscreen
- Alarm output
- External Pt100 sensor connection
- Cooling capacity up to 15 kW
- Heating capacity up to 15 kW
- Pump pressure up to 3 bar, max. flow rate 80 l/min

### Cool-down time

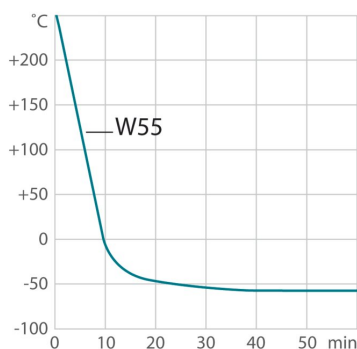


Medium: Thermal HL

### Heat-up time

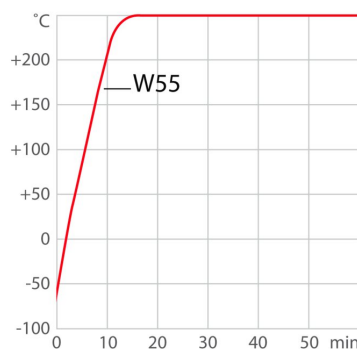

Medium: Thermal HL

### Pump capacity

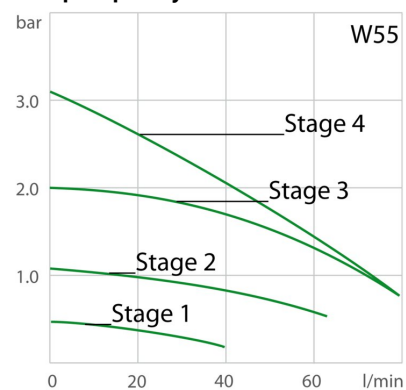

## Performance values

### 400V/3PNPE/50Hz (Plug 32A CEE)

Heating capacity kW	15
Viscosity max. cSt	50
Pump capacity flow pressure l/min	0 ... 80
Pump capacity pressure psi	1.5 ... 43.5
Power consumption A	32

## Refrigerant variants

Order number including voltage version 9421552.07

### Cooling capacity 1 (Ethanol)

°C	20	0	-10	-20	-30	-40	-50
kW <sup>1</sup>	15	10	6.5	4	2.5	1.2	0.3

### Cooling capacity 2 (Thermal HL30)

°C	20	10	0	-10	-20	-30
kW <sup>1</sup>	15.3	13.8	10.5	7	4.1	2.5

### Cooling capacity 3 (Water Glycol 40:60)

°C	20	10	0	-10	-20	-30	-40
kW <sup>1</sup>	15.3	13.8	10.5	6.9	4	2.3	1

### Cooling capacity 4 (Thermal HL60)

°C	250	200	100	20	0	-20	-30	-40	-50
kW <sup>1</sup>	12.4	13.3	15.5	15.9	10.7	4.7	2.8	1.4	0.5

### Refrigerant stage 1

Refrigerant	R452A
Filling weight g	1600
Global Warming Potential for R452A	2140
Carbon dioxide equivalent t	3.424

Order number including voltage version 9421552.S1.07

### Cooling capacity (Ethanol)

°C	20	0	-10	-20	-30	-40	-50
kW <sup>1</sup>	14.9	11.4	7.3	4.6	2.7	1.3	0.4

### Refrigerant stage 1

Refrigerant	R449A
Filling weight g	1600
Global Warming Potential for R449A	1397
Carbon dioxide equivalent t	2.2352

<sup>1</sup> Performance specifications measured in accordance with DIN 12876. Cooling capacities up to 20 °C measured with ethanol; over 20 °C with thermal oil unless otherwise specified. Performance specifications apply at an ambient temperature of 20 °C. Performance values may differ with other bath fluids.

## Technical data

Available voltage versions	
Order No.	9421552
Available voltage versions:	
9421552.16	208-230V/3PPE/60Hz (Without Plug) (R452A)
9421552.07	400V/3PNPE/50Hz (Plug 32A CEE) (R452A)
9421552.S1.07	400V/3PNPE/50Hz (Plug 32A CEE) (R449A)

Cooling	
Cooling of compressor	1-stage Water
Cooling water pressure max. psi	87
Max. heat dissipated by unit into cooling water kW	26

Recommended cooling water properties	
Cooling water temperature range °C	10 ... 15
Cooling water difference pressure psi	21.8 ... 87
Cooling water consumption l/min <sup>2</sup>	8 ... 12

Permissible cooling water properties	
Cooling water temperature range °C	5 ... 35
Cooling water difference pressure psi <sup>3</sup>	7.3 ... 87

<sup>2</sup> Cooling water consumption may vary outside recommended cooling water properties.

<sup>3</sup> At cooling water temperatures of 25 °C and higher, the minimum differential pressure is 1 bar.

Other	
Sound pressure level dbA	65
Classification	Classification III (FL)
IP Code	IP 20
Pump type	Centrifugal Pump

Electronics	
Interfaces	Alarm output, Ethernet, Modbus TCP/IP, Profibus optional, REG/EPROG optional, RS232, RS485 optional, SD memory card, Standby-Input optional, USB
External pt100 sensor connection	integrated
2nd external Pt100 sensor connection	accessory
Integrated programmer	8x60 steps
Temperature control	ICC
Absolute temperature calibration	3 Point Calibration
Temperature display	5.7" TFT Touchscreen
Temperature setting	Touchscreen

Dimensions and volumes	
Internal usable expansion volume l	7.5
Minimal process volume l	11.5
Active heat exchanger volume l	7
Weight lbs	634.9
Cooling Water Connection in	G¾
Total dimensions in. (W × L × H)	24 x 33.3 x 49.2
Pump connections	M30x1.5 male

Temperature values	
Setting the resolution of the temperature display °C	0.01
Working temperature range °C	-55 ... +250
Temperature stability °C	±0.05 ... ±0.1
Ambient temperature °C	+5 ... +40
Temperature display resolution °C	0.01

## All Benefits



### Touch display. Perfect operation.

With the touch display, the user always has an overview of all values and functions. The intuitive and multilingual menu structure enables perfect control.



### Convenience for several users

Administrator level for customizing instrument settings, user levels with limited permissions for fast and safe defined access, password protection, all levels adjustable



**100 % Cooling capacity**  
'Active Cooling Control' for cooling available throughout the entire working temperature range, fast cool-down even at higher temperatures



**Full control**  
'Temperature Control Features', for individual optimization, access to all important control parameters, additional settings for band limit, limits, co-speedfactor etc.



**Highest measuring accuracy**  
'Absolute Temperature Calibration' for manual compensation of a temperature difference, 3-point calibration



**Many interfaces.**  
Straight-forward remote control, data management, and integration into process structures. USB, Ethernet, RS232, SD card, and alarm off are permanently integrated. Further interfaces available as accessories.



**Continuous operation up to +40 °C**  
Robust temperature control instrument, continuous operation even at ambient temperatures of up to +40 °C



**Duplicate safety**  
Adjustable high temperature cut-off for internal tank and for integrated expansion vessel




**Quick support**  
If an error occurs, the integrated Black-Box function permits fast diagnosis by the JULABO service team



**Green technology.**  
Development consistently applied environmentally friendly materials and technologies.



**Quick start.**  
Individual JULABO consultation and comprehensive manuals at your disposal.



**Services 24/7.**  
Around the clock availability. You can find suitable accessories, data sheets, manuals, case studies, and more at [www.julabo.com](http://www.julabo.com).




**Intelligent temperature control.**  
Intelligent cascade control - automatic and self-optimizing adaptation of the PID control parameters with external stability of  $\pm 0.05$  °C.



**Control of the external application**  
External Pt100 sensor connection for precise measurement and control directly in the external application



**Intelligent pump system**  
Reliable and consistent pump capacity, electronically adjustable pump stages or pressure value, automatic adjustment of pump capacity to viscosity



**Space-saving footprint**  
All connections as well supply and exhaust air are located at the front or rear, no venting grids on the sides, units can be placed close to each other or the application



**Maximum safety.**  
Classification III according to DIN12876-1 enables safe operation, even with flammable fluids. Automatic switch-off in the event of high temperature or low liquid level.



**For flammable bath fluid**  
Classification III (FL) according to DIN 12876-1



**100% Checked.**  
100% testing. 100% quality. Each JULABO Circulator undergoes thorough quality testing before leaving the factory.



**JULABO. Quality.**  
Highest standards of quality for a long product life.



**Satisfied customers.**  
11 subsidiaries and more than 100 partners worldwide guarantee fast and qualified JULABO support.

